



Product Features

- 1, Constant current output
- 2, High Quality of light
- 3, High Reliability
- 4, Low Output Current Ripple
- 5, Isolated
- 6, Internal usage
- 7, Emergency power: 3W
- 8, Emergency periods: 1.5hrs

1) Compliances and Approvals

Approvals	CE EAC
Built-in/independent	Built in
Ingress protection	IP20
Suitable for fixture of protection Class	Class I
Output Safety Level	Isolated
Enviromental	Indoor
Features	Fixed

2) Electric Input Characteristics

) Electric Input Characteristics	Symbol	Remarks	Min.	Typical	Max.	Unit
Input Voltage						
Rated mains voltage	Vin	Nominal range	220	-	240	Vac
Mains voltage range	Vin.op	operational	195	-	264	Vac
Mains frequency nominal	fn	Nominal range	50		60	Hz
Rated mains voltage	Vin	Nominal range	195	-	264	Vdc
Input Current						
Input current	lin	@230Vac, full load		0.09		A
Input inrush current		@264Vac, 50% width		14.1A,228us		A, us
Power Factor	PF	@230Vac, full load	0.95			
Total Harmonic distortion	THD	@230Vac, full load			20	%
System Efficiency	η	@230Vac, full load		83		%
Input Power						
Input Power	Pin	@230Vac, full load			17	W
Input Power@ open load		rated input voltage			0.8	W
Input Power@ standby		rated input voltage		NA		

3) Electric Output Characteristics

) Electric Output Characteristics	Symbol	Remarks	Min.	Typical	Max.	Unit
Output Voltage						
Output voltage range	Vo	measured at end of wire	12		40	Vdc
Output voltage @no load	Vo.max	open load		60		Vdc
Output Current						
Output Current	Io			350		mA
Output Current tolerance			-5		5	%
Current Ripple		@230Vac (Imax-Imin)/(Imax+Imin)		1		%
Output Power						
	Po	output performance power			14	W
Isolation						
	In-Out	3000Vac. for 1min			10	mA

4) Emergency Characteristics

Symbol	Remarks	Min.	Typical	Max.	Unit
Emergency Power	@230Vac, full load		3		W
Recharge Time			24		Hours
Emergency Periods			1.5		Hours
Battery	LiFePO4		18650 6.4V 1.5Ah		
Self-testing			Without		

5) Robustness	Symbol	Remarks	Min.	Typical	Max.	Unit
General						
Electric strength	Input-Output	50Hz/60Hz and be applied for 1 min		3000		Vrms
	Input-GND			1480		Vrms
Insulation Resistance Test		500Vd.c. for 1min, For SELV part is 100 Vd.c.	2			MΩ
Reliability						
Rated Life@Tc.max		10% failure			50K	Hrs
Rated Life@Tc.life		10% failure			100K	Hrs
Surge	L-N			0.5		kV
Surge	L/N-PE			1		kV
Environment Operation						
Ambient temperature	Ta		0		45	℃
Maximum Tcase	Tc.max				70	℃
Tc life	Tc.life				60	℃
Operation Humidity	H.op		10		75	%
Environment Storage						
Storage temperature	T.st		-10		45	℃
Storage Humidity	Hst		10		75	%
Abnormal Condition						
Input Over Voltage		Protected, no damage to driver ^①		Without		Vac
Output Short Circuit		Protected, no damage to driver ^②		With		
Output Open load		Output voltage limited to Vo.max ^③		50		Vdc
Too High Ambient Temperature		Protected by built-in thermal protection in controller IC ^④		With		
Input Over Power		Input power should be limited and no damage to driver ^⑤			16	W

① If the LED driver connects to Input Voltage 380Vac, then the protection Turn On and the Led driver is switched off until its connect to Input voltage 220-240Vac.
In this protection mode, the led driver does not blink and can be not damage more than 48 hours

② Auto Recovery

③ Auto Recovery

④ The output current decreases

⑤ There is risk to damage the LED driver or decreses the life time.

6) Warranty

- Warranty 5 years
- Except for the following circumstance:
 - 1) Improper Installation or operation
 - 2) Misuse
 - 3) Abuse
 - 4) Unauthorized or improper repair alteration
 - 5) Accident or negligence in use, storage, transportation.
 - 6) Any natural destroy
 - 7) Exceed the specifiacion as per the product datasheet
 - 8) The battery needs to be replaced every 12 months

7) Mechanical properties

Symbol

Remarks


Unit

Dimensions

L	W	H	M
230(A1)	30(B1)	22.5(C1)	219.5(A2)
mm			

Housing Material

Metal

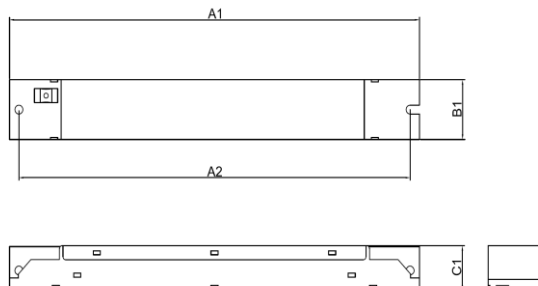

8) Physical properties

Symbol

Remarks

Unit

Weight

160

gram

Qty to Carton

50

pcs

Carton Size:

32*24*31

cm

G.W:

9.5

kgs

Potting Raw materials

without

Printing

printing can be changed by customer's email confirmation

size:167*27mm

INPUT		OSSDAT											OUTPUT	
PE	Earth		Uin,Vac	Fn,Hz	Pin,W	Iin,A	PF	Uout,Vdc	Umax,Vdc	Iout,mA	Ta,°C	Tc,°C	Test Switch	-
L	Un-Switched Supply	LED Driver PL-HMEM-014WBCC350 220-240Vac 50/60Hz	220-240	50/60	16	0.09	0.95	12-40	60	350	0...45	70	+	+
LS	Switched Supply												LED Indicator	-
N	Neutral												BS	-
													Battery	+

tc: test point

Battery - LiFePO4 6.4 V / 1.5Ah

Operating time 1.5 hour

Output power under emergency mode 3 W

9-10 mm 0.5-0.75 Cable

Made in China


Connection

Signal	Cable Description	Remark
Input	PE	grey, push-in terminal
	L	grey, push-in terminal
	LS	grey, push-in terminal
	N	grey, push-in terminal
Output	+	red, push-in terminal
	-	black, push-in terminal

Connection Marking

Yes

Connection Method

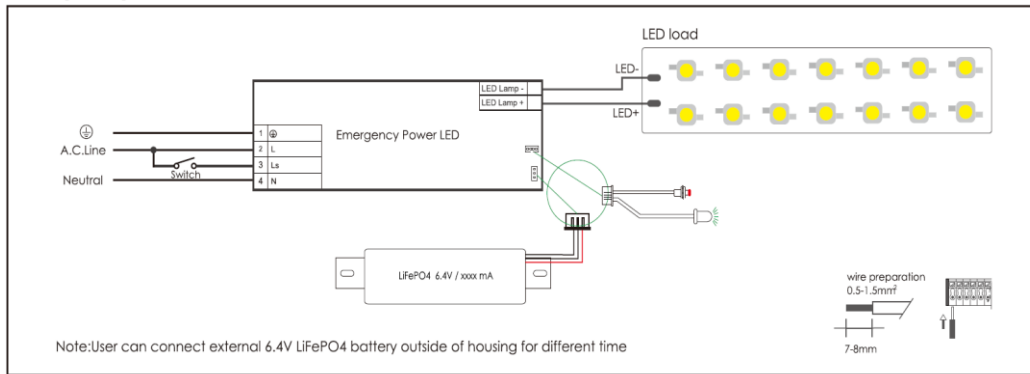


9) Test Switch

LED indicator

Mounting hole

wire Length

LED indicator status



Test Switch

Mounting hole

wire Length

indicate that charging status

Dia

6.5

mm

300

mm

Off: Battery disconnected or mains supply disconnected

Green stable: Battery charging or fully charged



:checking the device function

Dia

7

mm

300

mm

10) Battery

Symbol

Remarks

Unit

Dimensions


L	W	H	M	
105(A1)	37(B1)	22(C1)	87(A2)	mm
	95			gram
	100			pcs
	47*24*16			cm
	11			kgs

Weight

Qty to Carton

Carton Size:

G.W:

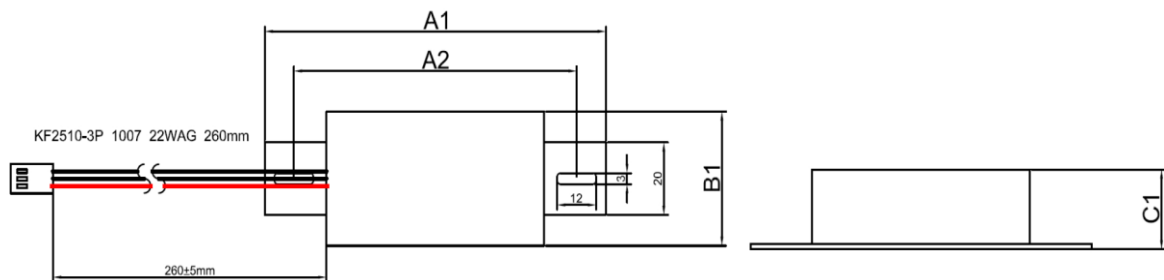

Remark

- LiFePO4 18
- Battery voltage 6.4v
- Rated 500 charge/discharge cycle
- Max.short term battery case temperature 70℃ (shorter than 1 month over the battery lifetime)
- Ambient temperature 0℃to+50℃
- Two wires:1 red and 2 black
- Length: 260mm
- The battery needs to be replaced every 12 months
- To guarantee the rated discharge time,please charge the battery for at least more than 12 hours.
- Charge and discharge cycle needs to be done at least once every three months,and the continuous charging time can not exceed 3 months.

11) Directives / Test Standards

Directives / Test Standards

Safety

IEC61347-1、IEC61347-2-7、IEC61347-2-13、IEC60598-2-22

EMC

EN55015、CISPR15、EN61000-3-2、EN61547、EN61000-4-2、EN61000-4-3、EN61000-4-4、EN61000-4-5、EN61000-4-6、EN61000-4-11

12) Addition Remarks

- The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. The manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.


- The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

- All parameters, if not specified, are measured at 230Vac full loading and 25℃ ambient temperature

-Note that when using input DC, the live wire is connected to the positive pole and the neutral wire is connected to the negative pole.

13) Performance

Lifetime vs. Temperature Curve

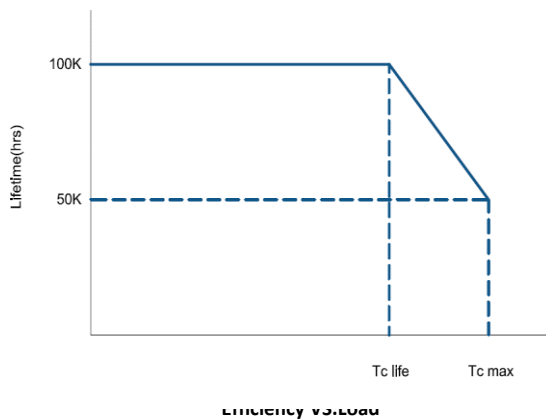

Operating window

